

# Providence Built-In Fireplace & Insert

The Providence design was inspired by the rich tradition of craftsmanship attributed our classic Parlour Stoves. The Providence's eastern inspired surround coupled with a remarkable attention to detail creates a design statement worthy of any well appointed home. Equipped with all standard Thelin Pellet Features, the Providence offers simplified service with removable panels and slide out cabinets. Additionally, the Providence may be built into new and remodel construction without a fireplace! Awarded a Vista Award for Design and Operation, the Providence is the "Premium Product Choice".

## Venturi burn pot

Holes in the cast iron burn pot are conically shaped and strategically placed to create better fuel to air mixing which results in lower emissions and cleaner glass. The Providence is EPA certified.

## Mirrored glass & great fire viewing

A large fire viewing window gives you an unobstructed view of the fire. You'll love the dancing flames created by the venturi burn pot when the stove is heating. The specially coated glass functions as a one way mirror hiding the firebox from view when the stove is off.

## Built-in rollers and optional track system

Rear mounted rollers take the work out of pulling the insert for yearly maintenance. An optional track system is available which makes access even easier and is especially well suited for raised hearths.

## Ash vac ports facilitate cleaning and reduce airborne fly ash

Ports located on opposite sides of the insert provide easy access for removing debris with an ash vac. This break through design greatly reduces airborne dust during routine maintenance. Additionally, the Providence's unique *clean* function removes loose ash from the insert with the simple push of a button.

## Adjustable hopper height and capacity

The Providence hopper is adjustable from 22" to 26" to provide maximum hopper capacity while fitting most fireplace openings.



Black Copper Vein Silver Vein

## Refueling is so easy

Simply lift the hopper lid and it becomes a shelf for resting the pellet bag while you refill. The two sides of the opening are sloped to enable easy clean up of any spilled pellets.

## Push-button temperature selection

The Providence's user friendly control panel and microprocessor provide adjustment to accommodate fuel quality and heat content of wood pellets.

## Conveniently located controls

The push button controls are hidden behind a decorative panel located at the top of the insert so there is no need to get on your hands and knees to make adjustments. The power cord can run on either side to reach the nearest outlet.

## Flue cleaning has never been so easy

The innovative flue outlet design lets you clean the entire flue with a brush and flex rods without removing the insert from the fireplace. A quick disconnect lets you unhook the flue when the insert is slid out for yearly maintenance.

## Specifications

Height	Adj. 22" - 26"
Width	26.4"
Depth	16"
Weight	200 lbs.
Exhaust Vent	3 or 4" PL
Exhaust to floor	5"
Hopper Capacity	Adj. 38-52 lbs.


## Standard Features for all models

- ✓ Quick disconnect flue
  - ✓ Innovative air wash system
  - ✓ Automatic electronic ignition
  - ✓ Dual Vacuum Ports for easy cleaning
  - ✓ Leveling screws and rollers
  - ✓ Cast iron Venturi burn pot
  - ✓ Vacuum assist clean function
  - ✓ Built in battery trickle charger
  - ✓ Large ash pan
  - ✓ Mirrored glass
  - ✓ Auxiliary battery receptacles
  - ✓ DC power technology
- ✓ Low power use for solar and off-the-grid applications

## Performance

Feed Rate	5.1 lbs. per Hr. (high)
	1.8 lbs per Hr. (Low)
BTU Rate	12,800 - 35,700
Combustion Efficiency	94%
Average Heat Exch. Efficiency	64% (CSA B415.1)
Heating Capacity	1500 - 2000 sq. ft.
EPA NSPS 2020 Grams/Hr.	1.08 Grams/Hr.
Power Consumption	27 watts 110VAC
Energy Efficiency	Average cost per month \$1.50 @ .18kw/hr

Appearances or features from those depicted in this brochure. Refer to the Owner's Manual for complete installation instructions. Installation must conform with local building codes.

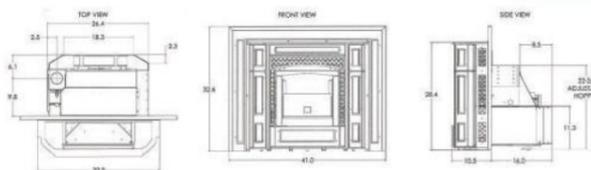

## No Fireplace? No Problem!

You can still enjoy the looks and warmth of the Providence even if you do not have a fireplace - The Providence is approved for use in wood frame construction so that you can add your own mantel and stone facing to look just like a site built fireplace!



## Theelin Company Limited Warranty

All Theelin Stoves are warranted from defect in workmanship for five years. Control systems, electrical, and plated components are warranted for one year. See specific product warranty for details.



Distributed By

P/N 00.0075.0114 • 12/13/19



Where comfort begins



Theelin Company - Continues the rich tradition of craftsmanship established over 35 years ago when the company was founded. Theelin Stoves and heaters are attractive and functional and have been recognized worldwide for innovative design. Classic Series now available in three categories, wood pellet burning, gas, and cord wood. Contemporary Series available in wood pellet freestanding and fireplace insert.

A Full Offering of EPA 2020 Approved Products

## Parlour & Gnome Pellet Heaters

Classic styling and new technology combined to offer push button operating ease. The thin pellet heaters offer three heat ranges with Auto Ignition (only with AC power) and thermostat operation make this a remarkable heater. Battery back up ready, consider adding the optional 12VDC battery for true back up heat. Parlour and Gnome models represent large and small space heating choices with a burn rate range of 40,000 and 27,000 btu. Environmentally conscious with an Ultra Low EPA 2020 emissions output of only 1.2 grams per hour for the Gnome and .43 grams per hour for the Parlour. With convenience, durability and vintage styling in mind, this unique stove will add a touch of elegance to your home.



SPECIFICATIONS	PARLOUR	GNOME	PERFORMANCE	PARLOUR	GNOME
Height	43"	34"	Feed Rate	5 lbs. per Hr. (High) 1.5 lbs. per Hr. (Low)	3.7 lbs. per Hr. (High) 1.0 lbs. per Hr. (Low)
Weight	180 lbs.	145 lbs.	Combustion Efficiency	93.34% - 40,000 BTU pr Hr.	94% - 27,000 BTU pr Hr.
Diameter	20"	17.5"	Average LHV Efficiency	83.1% - 31,500 BTU pr Hr.	63.3% - 18,000 BTU
Door Opening	14" x 9.5"	8" x 10"	EPA NSPS 2020 Grams/Hr.	0.43 Grams/Hr.	1.20 Grams/Hr.
Exhaust Vent	3"	3"	Heating Capacity	1500 - 2000 sq. ft.*	500 - 850 sq. ft.*
Exhaust to floor	12.25"	11.25"	Power Consumption	27 watts 110VAC	27 watts 100VAC
Hopper Capacity	42 lbs.	26 lbs.	Energy Efficiency	Average Cost per month \$1.50 @ .18 kw/hr	
Footprint	20" sq.	18.5" sq.			

## Parlour T-4000 Wood Stove

A remarkable heater for size and shape, the Parlour T-4000 sets the standard for certified wood stoves. Clean burning EPA 2020 1.8 grams per hour is accomplished non-catalytic with secondary burn technology and air wash to assist cleaning the viewing glass. The firebox will hold several 16" hardwood or high density logs and burn all night. Safe, efficient, and renewable, wood burning is the "green" choice.

### SPECIFICATIONS

Height: 43" Foot Print: 20" sq.  
Weight: 210lbs. Door Opening: 9"x12"  
Diameter: 20" Flue Diameter: 6"  
BTU's: 38,300

### PERFORMANCE

Heating Capacity: 1200 - 1500 Sq. Ft.\*  
Log Length: 16"  
EPA NSPS 2020 1.8 Grams/Hr.

\*Heating Capacity depends upon environment, insulation and quality of fuel.

### MODEL COLORS - CLASSIC

Painted (Metallic Finish): Black, Blue, Moss Green, Brown, Honey Glow Brown  
Painted (Matte Finish): Satin Black, Forrest Green, Golden-fire Brown  
(Custom Painted Color Matching Available at Additional Charge)  
Porcelain Enamel: Ebony Black, Ivory, Burgundy Red, Majolica Brown, Thelin Green, Cobalt Blue



Gnome and Parlour are available in porcelain enamel and painted finishes.

## Parlour & Gnome Direct Vent Gas Heaters

Gas heating and classic styling, not normally considered at the same time. The thin leads the way with cutting edge direct vent gas heaters approved for home, sleeping quarters, and manufactured home installation. Variable speed room air fans are standard and consider the optional thermostat for carefree operation. Available in Natural Gas or LPG.

### SPECIFICATIONS PARLOUR GNOME

Height	45"	34"
Weight	180 lbs.	145 lbs.
Diameter	20"	17.5"
Exhaust Diameter	6.625"	6.625"
Footprint	20" sq.	18.5"

### PERFORMANCE PARLOUR AFUE%\* GNOME AFUE%\*

BTU (Nat. Gas)	31,000	69.9	22,000	72.5
BTU (Lp Gas)	28,000	71.0	13,200	75.9
Heating Capacity	1200 - 1800 sq. ft.		500 - 800 sq. ft.	
Fan Type Vented Circulator	115 Volts, 1.5 Amps, 60 Hz.			*Efficiency

Fuel - Natural Gas or Propane

(must be specified at time of order)

Fan - 75 CFM - AC

Pipe Exit Outside Wall (from floor 71" O.C. / PARLOUR)

Pipe Exit Outside Wall (from floor 46" O.C. / GNOME)

Wall Thermostat - Optional (must be millivolt)

Simpson DuraVent, Metalbestos or Security Direct Vent Pipe

## Echo Gas Direct Vent Heater & Echo-Comstock Pellet Stove

Echo Gas and Comstock Pellet define the traditional cast stove style. As a free standing heater it maybe a primary home or space heat source. Available in six colors and both painted and porcelain finishes, the Echo Gas and Comstock Pellet are the perfect complement to any home decor.



Diamond Door



Traditional Door

### SPECIFICATIONS GAS DIRECT

Height	29" (736.6mm)
Width	26.5" (673mm)
Depth	20" (508mm)
Weight	215# (97.5K)
BTU (Nat. Gas)	27,000 Max, P4.1 Efficiency 68.81%
BTU (LP Gas)	26,000 Max, P4.1 Efficiency 65.81%
Heating Capacity	1200-1400 sq. ft.
Fuel:	Natural or LP Gas
Pipe Exit:	From floor to center of pipe 23.5"

### SPECIFICATIONS PELLET STOVE

Height	29"
Width	26"
Depth	28"
Weight	266 lbs - Shipping Wt. 310lbs
Door Opening	14"x13"
Hopper Capacity	50 lbs.
Base Foot Print	16"x26"

### CLEARANCE TO COMBUSTIBLES

Unit to Backwall	3"
Unit to Sidewall	5"
Unit to Diagonal Wall	3.5"
Floor Protector	6"
Min. Alcove Width	38"
Min. Alcove Height	48"

### PERFORMANCE

Feed Rate (low)	1.5 lbs/hr.
Feed Rate (high)	4 lbs/hr.
EPA 2020 Emissions	0.88 Gr/Hr
Heat Transfer Efficiency	74%
Combustion Efficiency	96%
Power Consumption	120VAC 28 watts



### Pellet Heater Standard Features:

Push-button control with clean function.  
DC Microprocessor Control Fuel Feed.  
Electronic 110V Ignition  
Long Life Venturi Styled Cast Iron Firepot.  
Easy Access - Cleaning and Maintenance.



### No Power - No Problem!

Gain freedom from power outages with Thelin's onboard power back up system. DC Drive technology allows for safe continuous battery operation. Using only 35 watts of power, Thelin Pellet Heaters could run for days with a properly sized battery.



### Power Up With Solar!

Thelin's microprocessor control lets you harness the power of the sun so you can run completely off the grid! With small solar panels and battery system Thelin's low 35 watt operation makes for a simple solar solution. Less Electricity than a low-wattage bulb: Thelin Pellet Heaters are approximately 10 times more efficient than most other pellet stoves.

### Gas Heater Features:

High Efficiency Direct Vent Design.  
Venting Horizontal & Vertical.  
Installation in front of Fireplace or on Hearth.  
Simple Pilot Ignition - Back up Heat.  
Optional Thermostat & Room Fan.